



IRIS is a university research consortium dedicated to monitoring the Earth and exploring its interior through the collection and distribution of geophysical data.

IRIS programs contribute to scholarly research, education, earthquake hazard mitigation, and the verification of the Comprehensive Test Ban Treaty.


Support for IRIS comes from the National Science Foundation, other federal agencies, universities, and private foundations.

This one-pager was produced in cooperation with New Mexico Institute of Mining and Technology.

1200 New York Ave, #400
Washington DC 20005
phone (202) 682-2220
fax (202) 682-0633
www.iris.edu

How Does a Seismometer Work?

A seismograph is a device for measuring the movement of the earth, and consists of a ground-motion detection sensor, called a seismometer, coupled with a recording system. A simple seismometer that is sensitive to up-down motions of the earth can be understood by visualizing a weight hanging on a spring. The spring and weight are suspended from a frame that moves along with the earth's surface. As the earth moves, the relative motion between the weight and the earth provides a measure of the vertical ground motion. If a recording system is installed, such as a rotating drum attached to the frame, and a pen attached to the mass, this relative motion between the weight and earth can be recorded to produce a history of ground motion, called a seismogram.

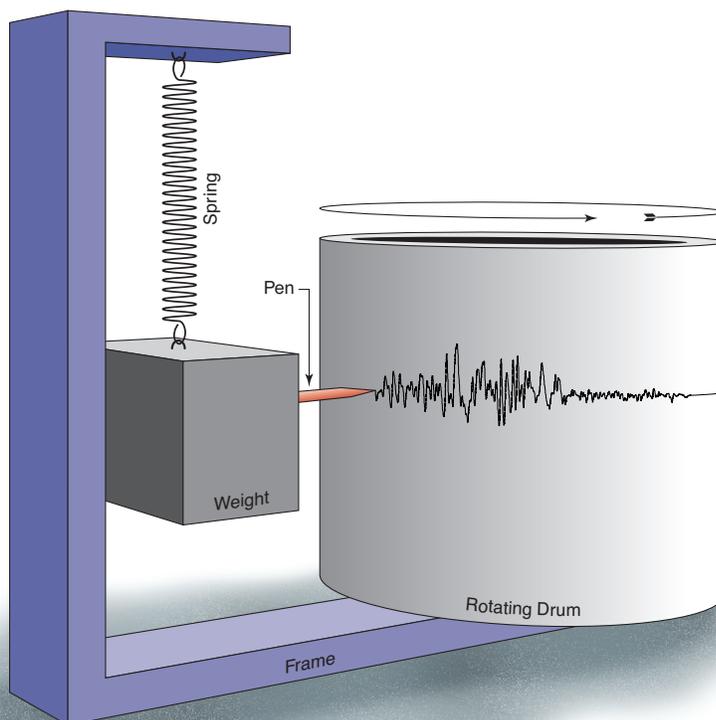

Seismographs operate on the principle of inertia -- stationary objects, such as the weight in the above picture, remain stationary unless a force is applied to them. The weight thus tends to remain stationary while the frame and drum are moving. Seismometers used in earthquake studies are designed to be highly sensitive to ground movements, so that movements as small as 1/10,000,000 centimeters (distances almost as small as atomic spacing) can be detected at very quiet sites. The largest earthquakes, such as the magnitude 9.1 Sumatra-Andaman Islands earthquake in 2004, create ground motions over the entire Earth that can be several centimeters high.

Modern research seismometers are electronic, and instead of using a pen and drum, the relative motion between the weight and the frame generates an electrical voltage that is recorded by a computer. By modifying the arrangement of the spring, weight and frame, seismometers can record motions in all directions. Seismometers also commonly record ground motions caused by a wide variety of natural and man-made sources, such as trees blowing in the wind, cars and trucks on the highway, and ocean waves crashing on the beach.